


Power Divider

2 way 700-2200MHz Low Cost

Model	D2-700-2200S
Frequency range	700-900 & 1700-2200 MHz
Insertion Loss	0.5 dB max.
Isolation	20 dB min.
Return Loss Input	17.7 dB
Output	20.8 dB
Amplitude Balance	0.2 dB
Phase Balance	$\pm 1^\circ$
Max. Power	5 W
Connectors	SMA(f)
Material: Housing	Aluminum, Conversion Coating RoHS Compliant
Environment	Indoor

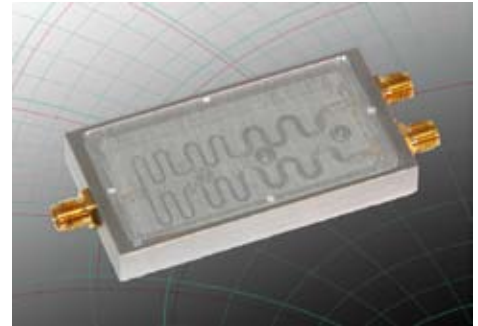

The Model D2-700-2200S is 2 way Wilkinson microstrip power divider, in phase, 5 Watts input power working into a 3:1 VSWR load mismatch. It is supplied with an SMA input connectors. The unit has a minimum isolation of 20 dB . Higher power levels and connectors types can be supplied upon request.

Made in USA

