


Model	D3-A12
Frequency range	400-1600 MHz
Isolation	20 dB Min.
Insertion Loss per channel	1.0 dB Max.
Phase Balance	± 5 deg
Input VSWR	1.25 Max.
Power rf	100 Watts Avg
Connectors	SMA female
Material: Housing and finish Connectors	Nickle Stainless steel
Temperature	-35 to + 65°C

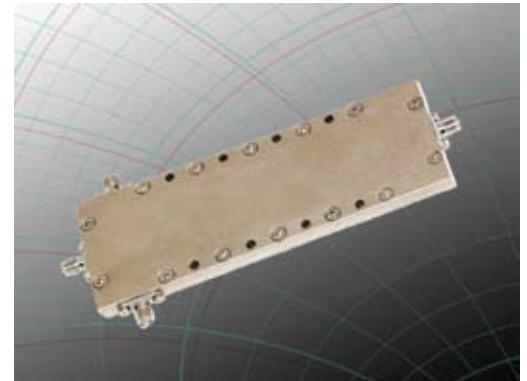

The Model D3-A12 is 1+3 divider in a high power 3way symmetrical design operating in the frequency range 400-1600 MHz. It is a resistor isolated. Wilkinson design utilizing high power resistors rated at 8 Watts each. The unit is provided with a type SMA female connectors.

- Multi-Band Range
- High Isolation, Low VSWR and Low Loss
- Rugged, Flange Mount Connectors with O-ring
- 30 W Average Power Rating
- High Reliability

**Made in USA**

