


# POWER DIVIDER

## 4 way 700-2200 Mhz Model D4-A13


Model	D4-A13
Frequency range	700-1000 and 1700-2200 MHz
Insertion Loss	6 dB NOM
Isolation	18 dB MIN.
Return Loss Input	20.8 dB
Output	17.7 dB
Max. Power	5 W
Connectors	SMA(f) in, QMA(f) out
Material:	
Housing	Aluminum, Conversion Coating RoHS Compliant
Inner conductor & Connectors	Brass, Silver Plated
Environment	Indoor

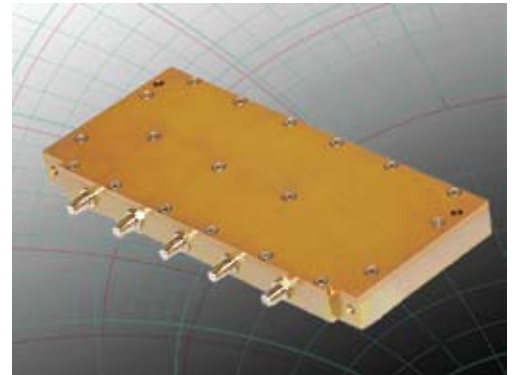

The Model D4-A13 is a four way broadband microstrip power divider with a power sensing 20dB directional coupler types are readily available upon request.

on the main line. The coupler is provided with an optional detector and log output circuit upon request. Amplitude balance of +/- 0.25dB is provided over each of the Cellular, PCS, and UMTS bands. Output isolation of the four (4) outputs is 20 dB Minimum. The Model D4-A13 is supplied with QMA connectors but other types are readily available upon request.

**Made in USA**

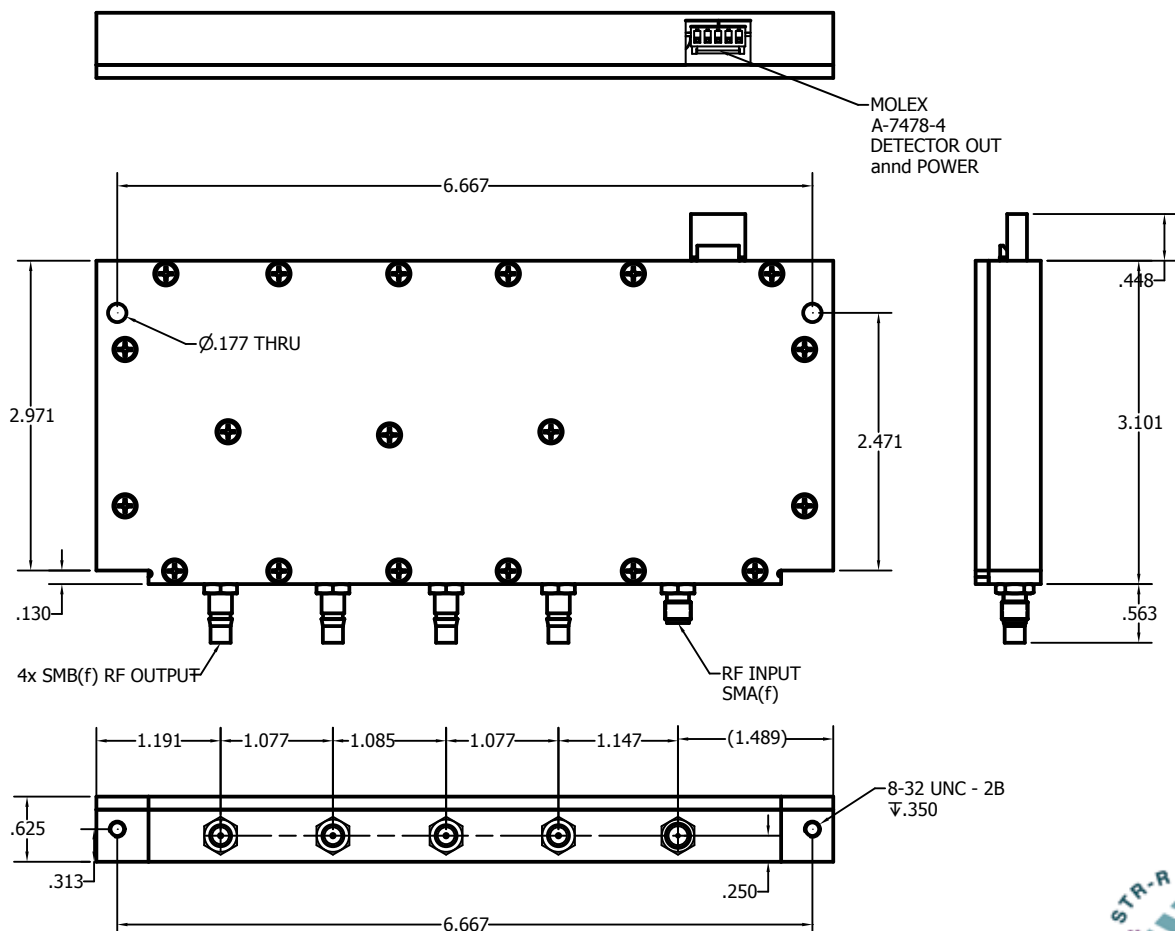

R&D Microwaves LLC, 11 Melanie Lane #12, East Hanover, NJ 07936 USA

Tel. 908.212.1696 [www.rdmicrowaves.com](http://www.rdmicrowaves.com)

email: [sales@rdmicrowaves.com](mailto:sales@rdmicrowaves.com)