



REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1.1	UPDATED PARAMETERS	4-19-2013	Ernest W
	1	FIRST ARTICLE RELEASE	3-8-2013	Ernest W

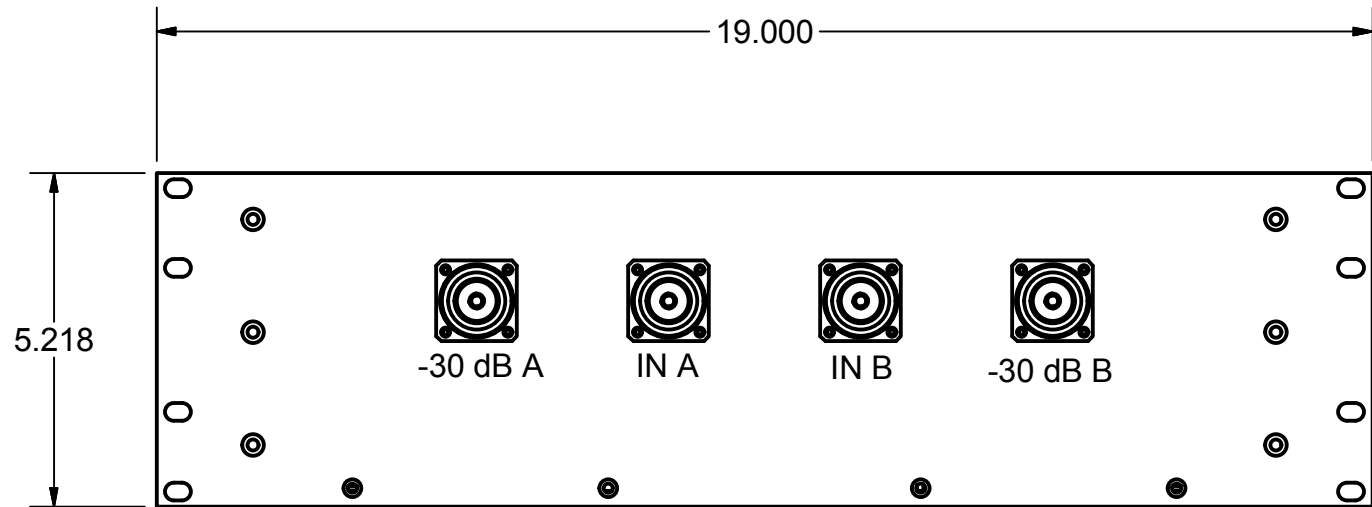

SPECIFICATIONS

FREQUENCY RANGE:	0.4-3.0 GHz	3.0-8.0 GHz	8.0-13.0 GHz
ATTENUATION: (INCL. FREQ. SENSITIVITY)	30 ± 1.0 dB		
ATTENUATION FLATNESS:	± 0.2 dB OVER ANY 20-MHz BW WITHIN 400-6000 MHz		
RETURN LOSS (INPUT):	-20 dB	-18 dB	-15 dB
RETURN LOSS (ATTEN'D):	-20 dB	-15 dB	-10 dB
INTERMODULATION:	-165 dBc		
MAX. INPUT POWER:	160 W		
MECHANICAL:			
CONNECTION INTERFACE:	3U RACK MOUNT ENCLOSURE, 15" DEEP (NOM.) DIN(f), 4-HOLE FLANGE, 50-OHM		

DRAWN Ernest Werbel	3/4/2013	 R&D Microwaves LLC, USA
CHECKED		
QA		TITLE
MFG		LOW PIM HIGH POWER ATTENUATOR
APPROVED		SIZE B
		DWG NO DAS-A24
		SCALE
		REV 1
		SHEET 1 OF 1