

DIPLEXER FILTER

DI-A40XX, 380-520/698-980 & 1710-2700 MHz

Model	DI-A40	
Frequency Range:	380-520 MHz	698-980 & 1710-2700 MHz
Input Power:	50W, 3kW	120W, 3kW
Pass Band Loss:	<0.3 dB	<0.5 dB
Input VSWR:	<1.35:1 (<1.30:1 Typ.)	
Isolation:	50 dB MIN, 60 dB TYP.	
Passive Intermodulation:	> 153 dBc 2x 43dBm/tone at Input port	
Environmental:	IP64	
Finish & Material:	Clear Iridite Aluminum Triplated Brass	
Housing:	Clear Iridite Aluminum	
Connectors:	Triplated Brass	
Connectors (select):	7-16 DIN(f), Type N(f), 4.3-10.0(f)	
Ambient Temp Range:	-35°C to +60°C	




Model No.:

DI-A40DF = 7-16 DIN(f)

DI-A40NF = Type N(f)

DI-A40D43F = 4.3-10.0(f)

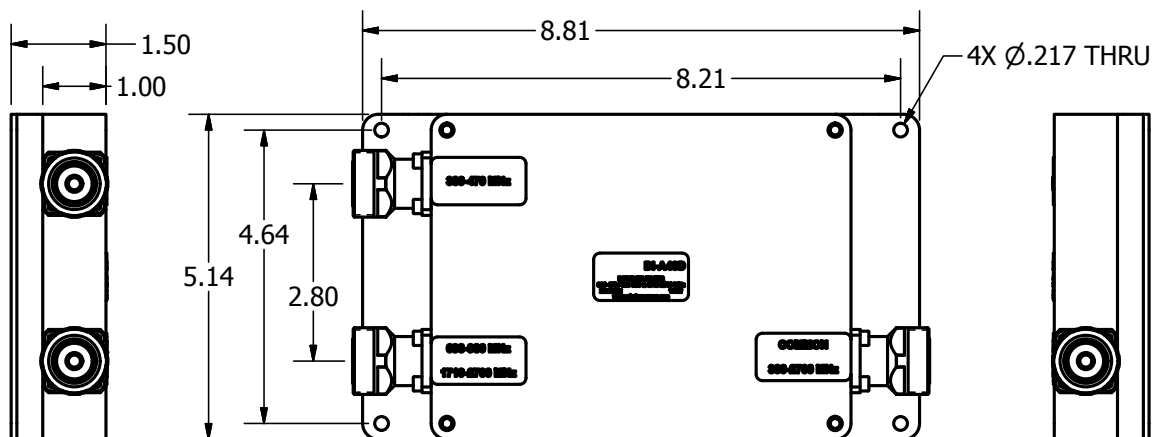

R&D Microwaves LLC, 301 Rockaway Valley Road, Boonton, NJ 07005 USA
 Tel. 908.212.1696 www.rdmicrowaves.com
 email: sales@rdmicrowaves.com

Rev 1.2
 8/14/17

