
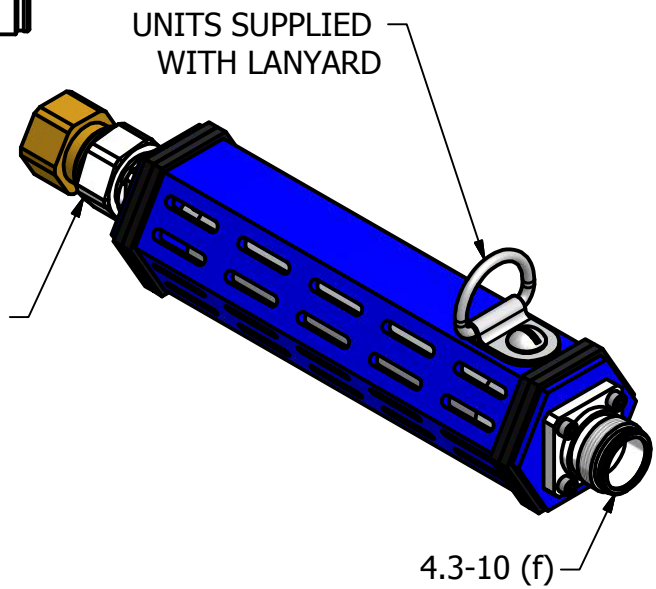
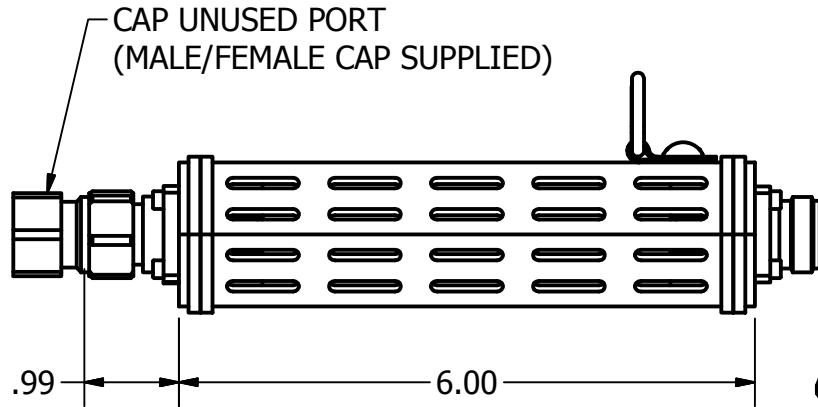



REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	ENGINEERING RELEASE	10/31/2017	DM
	2	REVISED SPECS, ADDED CAP	11/7/2017	DM



FREQUENCY: 698-2700 MHz
 RETURN LOSS: 17 dB MAX; 24 dB TYP
 PIM: 160 dBc

MODELS: TA-A83D43MF (4.3-10 MALE AND FEMALE)
 TA-A83DMF (7-16 DIN MALE AND FEMALE)

PROPERTY OF R&D MICROWAVES LLC

DRAWN mclaughlind	10/31/2017	 R&D Microwaves LLC, USA
CHECKED TB	11/7/2017	
QA MdB	11/7/2017	TITLE
MFG		TA-A83, LOW PIM TERMINATION WITH MALE AND FEMALE CONNECTORS
APPROVED		SIZE
		A
		DWG NO
		TA-A83-OLrev2
		REV
		2
		SCALE
		1 : 2
		SHEET 1 OF 1