


8 Way Power Divider


D8-A01S, 8-Way resistive power divider

Model	D8-A01S
Frequency Range:	DC-4000 MHz
Insertion Loss:	18 dB Nominal
Isolation:	15.0 dB Min.
Input Return Loss:	18 dB Min.
Amplitude Balance:	±0.2 dB
Phase Balance:	±5°
Connectors:	SMA(f)
Power:	1 Watt

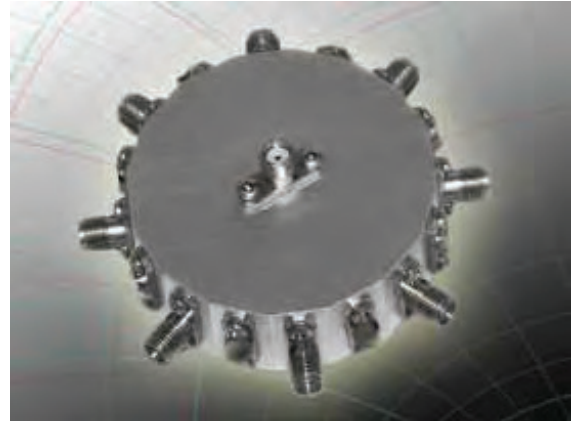

R&D Microwaves Model D8-A01 is a broadband 8-Way resistive power/combiner. It is phase and amplitude balanced with low VSWR and ripple over the full band. With the unique radial and symmetrical resistive circuit used, the basic design can be readily be modified for any number of outputs, odd or even, within the same outline envelope. The model D8-A01 is available with Type N female connectors; See model D16-A01 for 16-Way power divider with similar specs.

Made in USA.

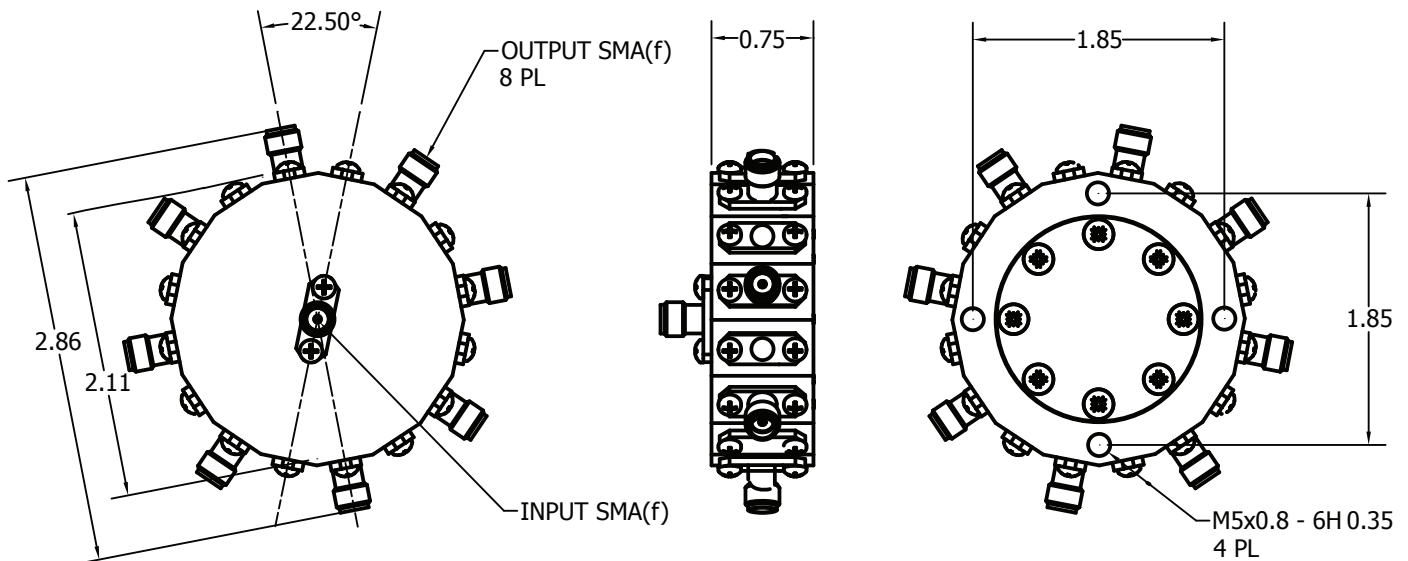

R&D Microwaves LLC, 301 Rockaway Valley Road, Boonton, NJ 07005 USA
 Tel. 908.212.1696 www.rdmicrowaves.com
 email: sales@rdmicrowaves.com

Rev 1.1
 01/26/16

